

Midi free-standing Beacons / Permanent Light 895 Permanent Beacon BWM 12-230VAC/DC CL



!

Part No.: 895.400.00

| CE | UK CA |
|----|----------|
| | |

MECHANICAL DATA

| MECHANICAL DATA | |
|------------------------------|--------------------------------|
| Height | 148 mm |
| Diameter | 149 mm |
| Materials | PC PC/ABS |
| Dome colour | Clear |
| Housing colour | Grey |
| Protection category | IP65 |
| Connection | Insulation-displacement contac |
| cross-sectional area maximum | 1,50mm² / 16AWG |
| Cable entry | Screwed cable gland |
| Cable entry minimum | d = 6 mm |
| Cable entry maximum | d = 12 mm |
| Tension relief | Present (conforms to VDE) |
| Type of fixing | Base mounting Wall mounting |
| Working temperature minimum | -30°C |
| Working temperature maximum | +50°C |
| Weight with packaging | 491 g |
| Product weight | 419 g |
| ELECTRICAL DATA | |
| Operating voltage | 12-230V |
| Operating voltage type | AC/DC |
| Protection class | Protection class 2 |
| Pollution degree | 3 |
| Overvoltage category | II |
| Isolation voltage | Ui = 250V; Uimp = 2.500V |
| OPTICAL DATA | |
| Light colour | White |
| Service life optical | depends on bulb |
| APPROVAL DATA | |
| Conforms with CE | Yes |
| Conforms with RoHS directive | Yes |
| WEEE | Yes |
| Conforms with ATEX-directive | No |
| | NU |
| Conforms with CCC | No |
| | |
| Conforms with CCC | No |

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.


!



Midi free-standing Beacons / Permanent Light 895 Permanent Beacon BWM 12-230VAC/DC CL

| Conforms with IC | No |
|-------------------------------|-----------------------|
| EAC certificate available | Yes |
| Conforms with UKCA (Importer) | Yes (WERMA (UK) Ltd.) |
| Conforms with AS-I | No |
| ICAO Certification | No |
| Conforms with DNV | No |
| Conforms with RoHS CN | No |
| Conforms with VdS | No |

DRAWING

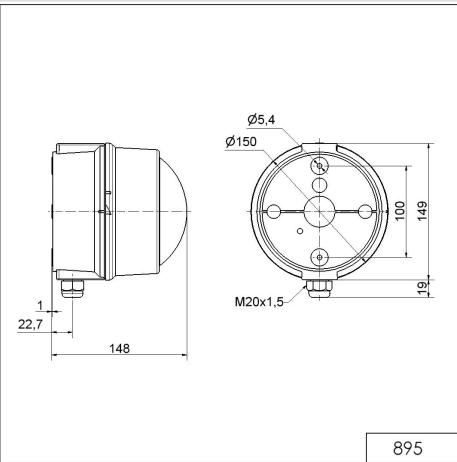

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.