## Completely pre-assembled Signal Towers / CleanSIGN CleanSIGN BM Contin. tone 24VDC GN/YE/RD



ļ

Part No.:	695.310.55	
Series:	CleanSIGN	
MECHANIC	CAL DATA	
Length		152 mm
Width		112 mm
Height		390 mm
Diameter		77 mm
Materials		PA
Dome colour		Clear
Housing colour		Black
Protection category		IP67 IP69K
Connection		Cable
Cable length		2500 mm
Type of fixing		Base mounting
Working temperature minimum		-30°C
Working temperature maximum		+50°C
Weight with packaging		690 g
Product weight		543 g
ELECTRIC	AL DATA	
Operating voltage		24V
Operating voltage type		DC
Operating voltage tolerance		+/- 10%
Rated operational voltage		24 VDC
Rated operational current		380 mA
Rated inrush current		450 mA
Protection class		Protection class 2
Pollution degree		3
	АТА	
Light sourc	e	LED
Light colour		Green Red Yellow
Optical signal image		Permanent
Service life optical		50,000 h maximum
ACOUSTIC	DATA	
Volume (max) at 1m distance		85,0 dB (A)
Acoustic signal image		Continuous tone
Audio frequency		2400 Hz
Acoustic service life		5,000 h minimum

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.


## Completely pre-assembled Signal Towers / CleanSIGN CleanSIGN BM Contin. tone 24VDC GN/YE/RD

APPROVAL DATA			
Conforms with CE	Yes		
Conforms with RoHS directive	Yes		
WEEE	No		
Conforms with ATEX-directive	No		
Conforms with CCC	No		
Conforms with UL	No		
Conforms with FCC	No		
Conforms with IC	No		
EAC certificate available	Yes		
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)		
Conforms with CMIM	No		
Conforms with AS-I	No		
ICAO Certification	No		
Conforms with DNV	No		
Conforms with RoHS CN	No		
Conforms with VdS	No		

Provide the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

!

## Completely pre-assembled Signal Towers / CleanSIGN CleanSIGN BM Contin. tone 24VDC GN/YE/RD

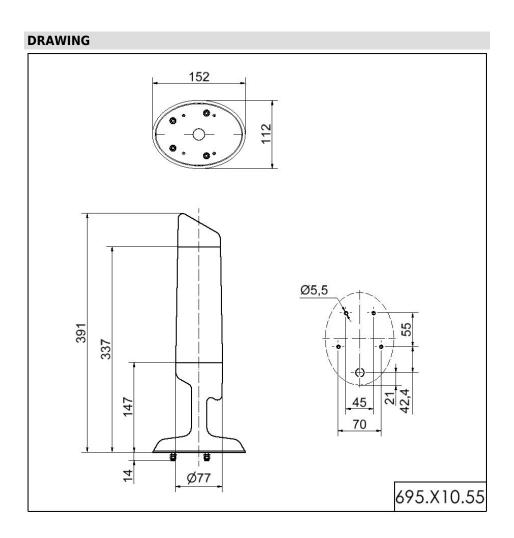

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.