

KombiSIGN 40 / ClassicLOOK

**TwinLIGHT Classic 24VAC/DC BU**


|                  |                     |
|------------------|---------------------|
| <b>Part No.:</b> | <b>634.510.75</b>   |
| <b>Series:</b>   | <b>KombiSIGN 40</b> |


**MECHANICAL DATA**

|                             |               |
|-----------------------------|---------------|
| Height                      | 59 mm         |
| Diameter                    | 40 mm         |
| Materials                   | PC            |
| Dome colour                 | Blue          |
| Protection category         | IP66<br>IP69K |
| Working temperature minimum | -30°C         |
| Working temperature maximum | +60°C         |
| Weight with packaging       | 40 g          |
| Product weight              | 29 g          |

**ELECTRICAL DATA**

|                             |                    |
|-----------------------------|--------------------|
| Operating voltage           | 24V                |
| Operating voltage type      | AC/DC              |
| Operating voltage frequency | 50Hz               |
| Operating voltage tolerance | +/- 10%            |
| Rated operational voltage   | 24 VDC             |
| Rated operational current   | 30 mA              |
| Rated inrush current        | 500 mA             |
| Protection class            | Protection class 3 |
| Pollution degree            | 3                  |
| Request to external PSU     | SELV/PELV          |

**OPTICAL DATA**

|                      |                                 |
|----------------------|---------------------------------|
| Light source         | LED                             |
| Light colour         | Blue                            |
| Optical signal image | Blink<br>Permanent<br>TwinLight |
| Blink frequency      | 1 Hz                            |
| Service life optical | 50,000 h maximum                |

**APPROVAL DATA**

|                              |         |
|------------------------------|---------|
| Conforms with CE             | Yes     |
| Conforms with RoHS directive | Yes     |
| WEEE                         | Yes     |
| Conforms with ATEX-directive | No      |
| Conforms with CCC            | No      |
| Conforms with UL             | cULus   |
| UL Type Rating               | Type 12 |




For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

KombiSIGN 40 / ClassicLOOK

## TwinLIGHT Classic 24VAC/DC BU

|                               |                       |
|-------------------------------|-----------------------|
| Conforms with FCC             | No                    |
| Conforms with IC              | No                    |
| EAC certificate available     | Yes                   |
| Conforms with UKCA (Importer) | Yes (WERMA (UK) Ltd.) |
| Conforms with CMIM            | No                    |
| Conforms with AS-I            | No                    |
| ICAO Certification            | No                    |
| Conforms with DNV             | No                    |
| Conforms with RoHS CN         | No                    |
| Conforms with VdS             | No                    |
| MTTF-value [years]            | 1695                  |

### DRAWING

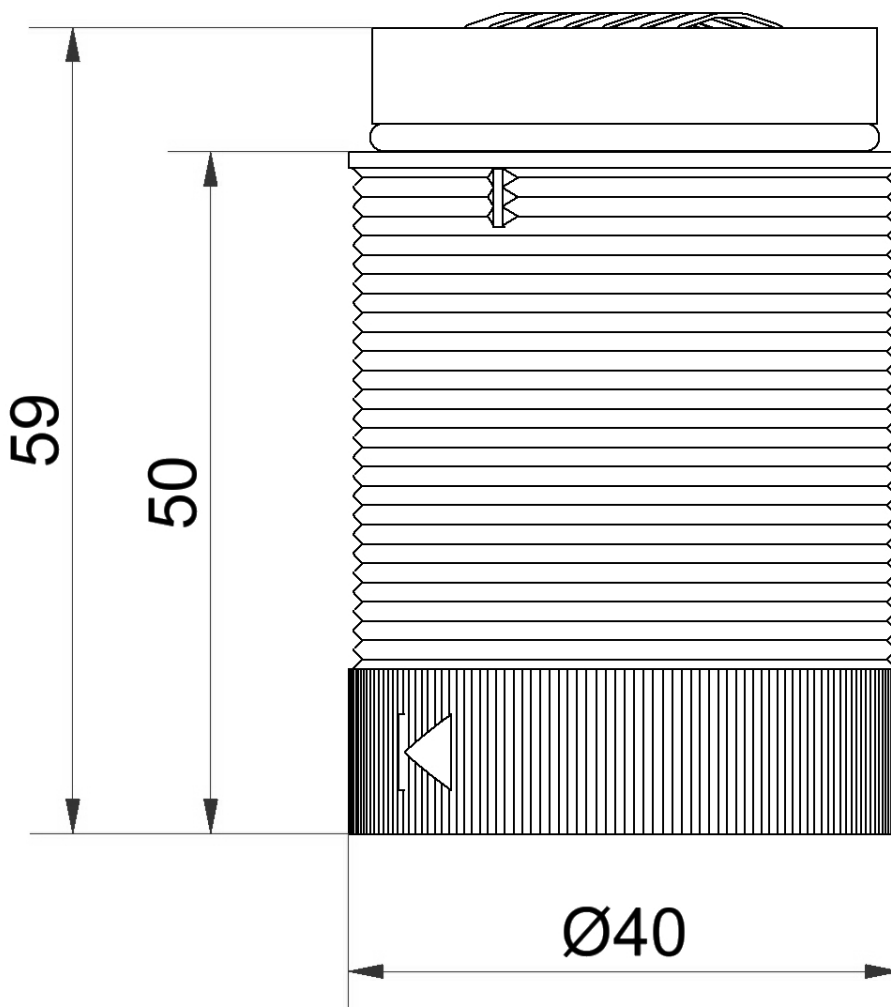

For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.