

Mini installation beacon / MC55

## MC55 UL Beacon 10-30V RGB M12



|           |            |
|-----------|------------|
| Part No.: | 240.320.50 |
| Series:   | MC55       |



### MECHANICAL DATA

|                             |                   |
|-----------------------------|-------------------|
| Height                      | 82 mm             |
| Diameter                    | 55 mm             |
| Materials                   | PC                |
| Dome colour                 | Trancluent        |
| Housing colour              | Black             |
| Protection category         | IP65<br>IP69K     |
| Connection                  | M12 plug 5-pole   |
| Type of fixing              | Built-in mounting |
| Working temperature minimum | -20°C             |
| Working temperature maximum | +50°C             |
| Weight with packaging       | 93 g              |
| Product weight              | 66 g              |

### ELECTRICAL DATA

|                             |                                |
|-----------------------------|--------------------------------|
| Operating voltage           | 10-30V                         |
| Operating voltage type      | DC                             |
| Operating voltage tolerance | +/- 0%                         |
| Rated operational voltage   | 24 VDC                         |
| Rated operational current   | 120 mA                         |
| Rated inrush current        | <700mA                         |
| Protection class            | Protection class 2             |
| Pollution degree            | 3<br>In the connection area: 2 |
| Overvoltage category        | I                              |
| Isolation voltage           | Ui = 50V / Uimp = 330V         |

### OPTICAL DATA

|                      |                  |
|----------------------|------------------|
| Light source         | LED              |
| Light colour         | MC 7 colours     |
| Optical signal image | Permanent        |
| Service life optical | 50,000 h maximum |

### APPROVAL DATA

|                              |       |
|------------------------------|-------|
| Conforms with CE             | Yes   |
| Conforms with RoHS directive | Yes   |
| WEEE                         | Yes   |
| Conforms with ATEX-directive | No    |
| Conforms with CCC            | No    |
| Conforms with UL             | cULus |





For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

Mini installation beacon / MC55

## MC55 UL Beacon 10-30V RGB M12

|                               |                       |
|-------------------------------|-----------------------|
| UL Type Rating                | Type 4X               |
| Conforms with FCC             | No                    |
| Conforms with IC              | No                    |
| EAC certificate available     | No                    |
| Conforms with UKCA (Importer) | Yes (WERMA (UK) Ltd.) |
| Conforms with AS-I            | No                    |
| Conforms with DNV             | No                    |
| Conforms with RoHS CN         | 25 years              |
| Conforms with VdS             | No                    |
| MTTF-value [years]            | 133                   |

### DRAWING

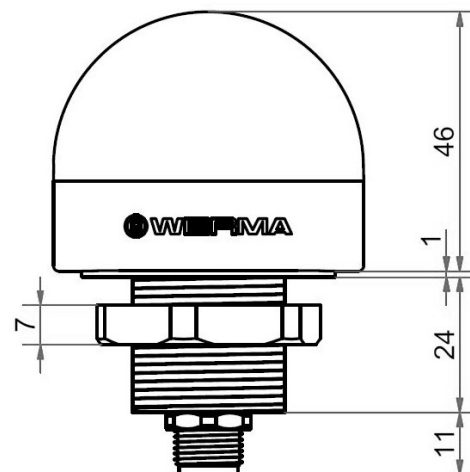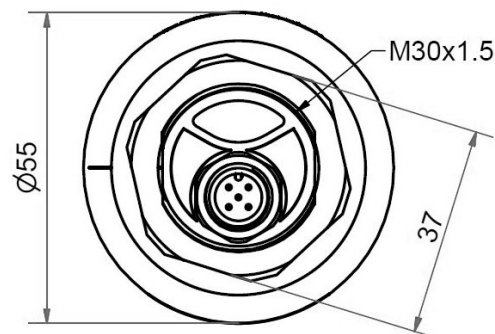

For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.