# Midi / LED/Multi-Tone Sounder 432 LED Siren WM 32 tne 24VAC/DC GN



Part No.: 432.200.75



#### **MECHANICAL DATA** Length 144 mm Width 134 mm Height 235 mm Diameter 134 mm Materials PC PC/ABS Dome colour Green Housing colour Grev Protection category IP65 Screw terminals Connection 1,50mm<sup>2</sup> / 16AWG cross-sectional area maximum Cable entry Membrane grommet Cable entry minimum d = 1 mmCable entry maximum d = 13 mm Present (conforms to VDE) Tension relief Type of fixing Wall mounting Working temperature minimum -30°C +50°C Working temperature maximum Weight with packaging 645 g Product weight 500 g **ELECTRICAL DATA** Operating voltage 24V AC/DC Operating voltage type Operating voltage frequency 50Hz +/- 10% Operating voltage tolerance Rated operational voltage 24 VDC Rated operational current 540 mA Rated inrush current 400 mA Protection class Protection class 2 Pollution degree 3 **OPTICAL DATA** Light source LED Light colour Green Permanent Optical signal image Service life optical 50,000 h maximum

### ACOUSTIC DATA

I


For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

# Midi / LED/Multi-Tone Sounder 432 LED Siren WM 32 tne 24VAC/DC GN

Volume (max) at 1m distance	108,0 dB (A)
Acoustic signal image	Multi-tone
Number of tones	32 tone
Acoustic service life	5,000 h minimum
APPROVAL DATA	
Conforms with CE	Yes
Conforms with RoHS directive	Yes
WEEE	Yes
Conforms with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	cULus
UL Type Rating	Type 12
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with CMIM	No
Conforms with AS-I	No
ICAO Certification	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No

Pror additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

# Midi / LED/Multi-Tone Sounder 432 LED Siren WM 32 tne 24VAC/DC GN

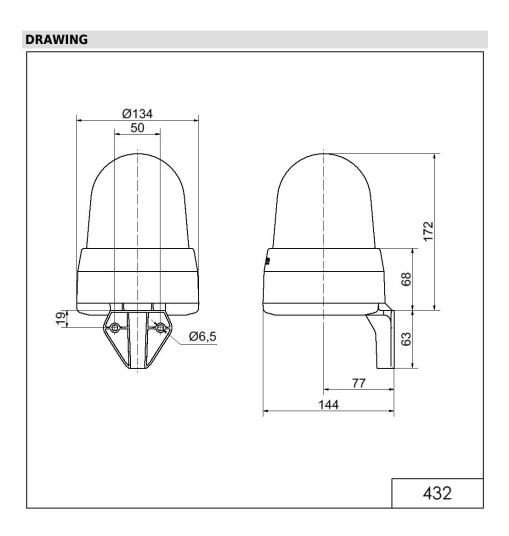

Pror additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.